

Appliances properties: Buderus, Bosch Thermotechnik GmbH - 173.6/178.6


Master data		
Date of entry	Jun 4, 2011	
Manufacturer	Buderus, Bosch Thermotechnik GmbH	
Model	173.6/178.6	
Nominal heat output [kW]	11.6	
Continuous burning appliance	_	
Type test standard	DIN 18892	
Year of testing	1964	
Further important characteristics of the appliance		
Suitability for installation to a shared flue ¹⁾		_
Connectivity to the central heating system		_
General technical approval for room sealed operation		_
1) For unsealed operation it is possible to install the appliances to a shared fl	ue system (please see installation manual).	
On behalf of the manufacturer, the HKI Industrieverhand e.V. hereby confirm	s compliance with the respective requirements* in accordance with 1 BImSchV	The type test report of the fireplace has

On behalf of the manufacturer, the HKI Industrieverband e.V. hereby confirms compliance with the respective requirements* in accordance with 1.BImSchV. The type test report of the fireplace has been submitted to the HKI Industrieverband e.V.

Norm: Inset appliance with flat-layer firing Evaluation D - 1.BImSchV According to the transitional rule §26 the appliance can be used until 31.12.2014 F - Crédit d'impôt à la transition énergétique

Evaluation of emission data and efficiency Lignite briquettes		
Norm : Inset appliance with flat-layer firing	Evaluation	
D - 1.BlmSchV	!	

^{*} A green check mark with a "1" indicates that the requirements of the 1st BImSchV are fulfilled, a green check mark with a "2" indicates that the 2nd level of the 1st BImSchV is fulfilled. A yellow check mark shows that the transitional regulation of the 1st BImSchV is fulfilled and a red line means that the 1st BImSchV is not fulfilled.

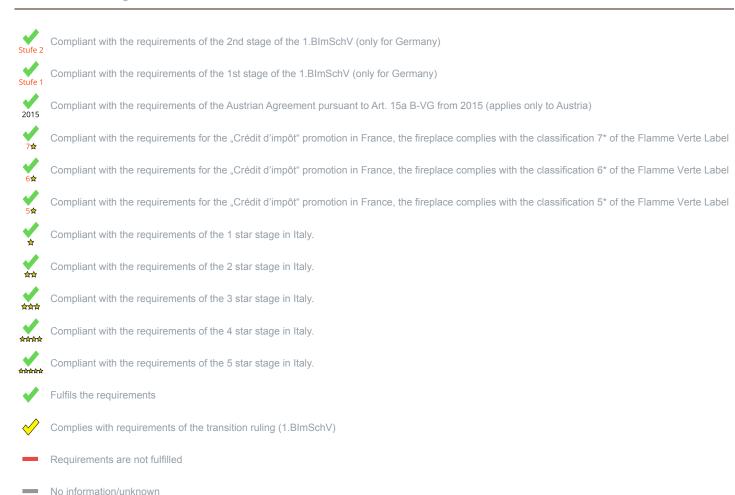

No symbol means that there are no requirements.

No measuring values are available for this fuel, operation with this fuel is not permitted

Here you will find further information